

SPEARHEAD

FLAIL MOWER RANGE



THE CUTTING PERFORMANCE YOU DESERVE

Spearhead has been at the forefront of vegetation control machinery for over three decades. We listen intently to customer feedback in a quest to perfect our machines. They're robust, long-lasting, and highly efficient.

Our extensive Flail range comprises a host of inline, offset and folding mower options presented to ensure optimum output in all applications. From the smallest Sniper 125 Mini model, through to the Sniper 600 SHD all bases are covered to make managing your vegetation faster, easier, safer and more comfortable than ever before.


The Spearhead Flail range sets the standard. Anything less won't deliver the performance you deserve.

CONTENTS

SNIPER MINI.....	4
SNIPER COMPACT.....	6
SNIPER.....	8
SNIPER RS.....	10
SNIPER OFFSET.....	12
SNIPER HD.....	14
SNIPER HD OFFSET.....	16
SNIPER SHD.....	18
SNIPER 600 SHD.....	20
ROLLIFLAIL HD.....	22
ROLLIFLAIL HD OFFSET.....	24
SPECIFICATIONS.....	26



SNIPER MINI

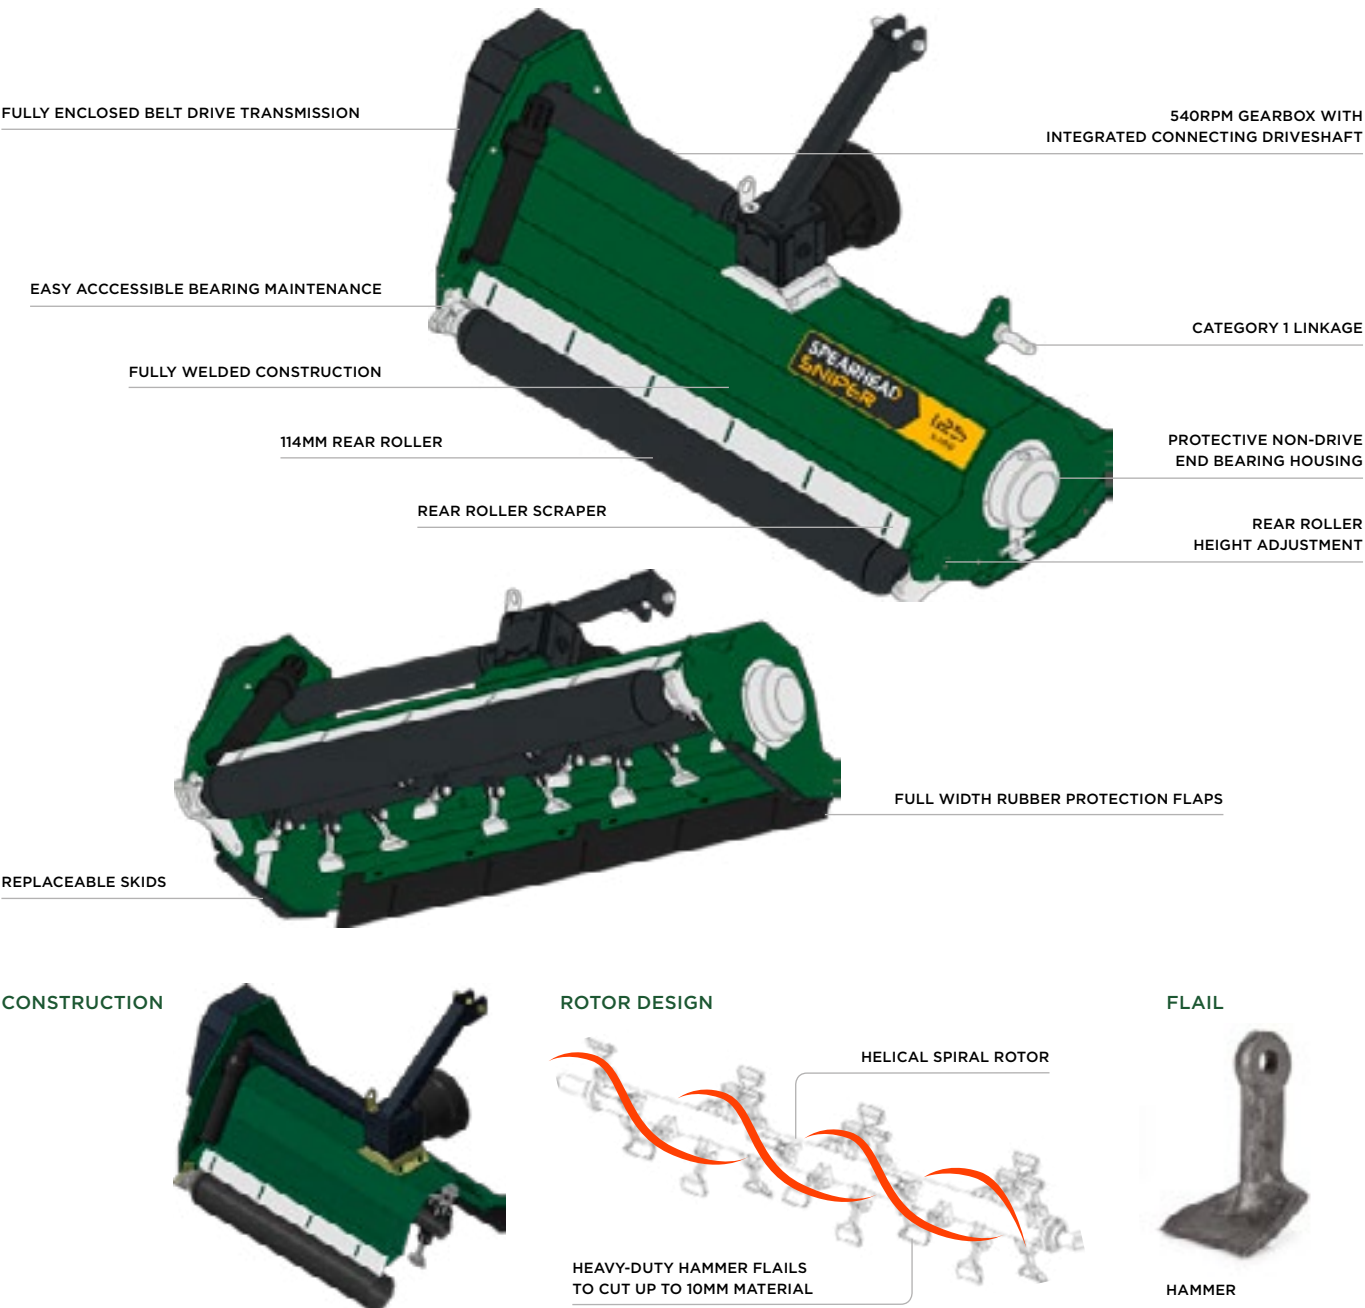

With a cutting width of 1.25m, the Sniper 125 Mini flail mower is suitable for lawns, parkland and amenity operations fitted to tractors of 15hp and greater.

This fully welded machine features a low maintenance, high speed dual belt driven transmission powered via a gearbox and enclosed connecting driveshaft to give dependable performance to each of its 26 hammer flails.

A 114mm adjustable rear roller with accompanying scraper bar safely provides a tidy and professional finish to the cut material and allows the machine to be able to offer a range of cutting heights to the operator.

	HP TRACTOR HP	KG MINIMUM WEIGHT GUIDE	 MACHINE WEIGHT	 CUTTING WIDTH	 HITCH	 PTO SPEED	 FLAIL TYPE	 NUMBER OF FLAILS	 CUTTING HEIGHT
	15 - 30hp (12-19kW)	1700kg (3748lbs)	115kg (254lbs)	1.25m (4' 1")	Rear mount only	540rpm	Heavy-duty hammer flail	26	22 - 47mm (7/8" - 1 9/16")



TRACTOR
POWER

15hp
(12kW)




CUT WIDTH

1.25m
(4' 1")



SNIPER COMPACT

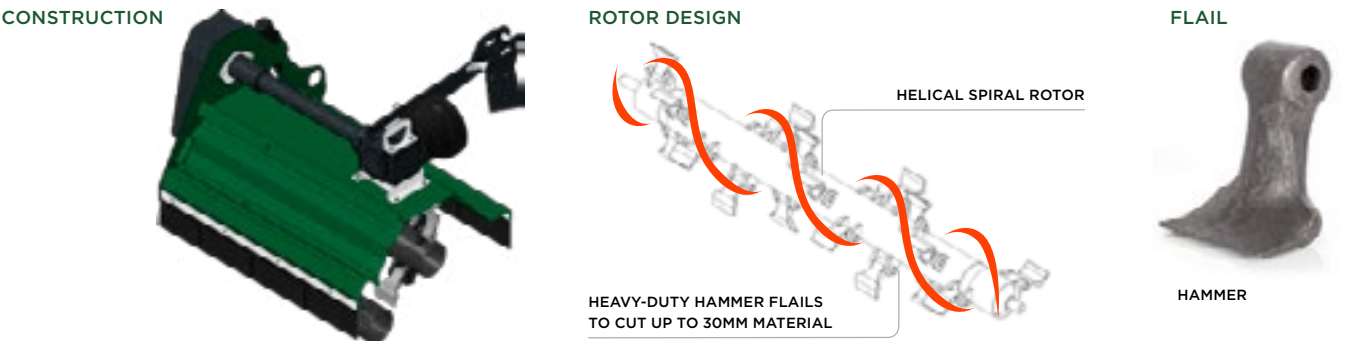

The Sniper 150 compact flail mower is the perfect choice for the small holder or small scale amenity user with an eye for achieving a high quality and consistent cut in pasture, paddock and general vegetation control applications when working with a compact tractor.

This robust machine features heavy-duty hammer flails fitted on an electronically balanced spiral rotor ideally suiting it for light scrub clearance in material up to 30mm.

Dependable power transmission is given through dual belt drive and in combination with full width adjustable skids and rear roller with scraper to ensure a quality, well distributed cut.

The Sniper 150 features a cutting width of 1.5 metres with an adjustable mounting headstock that can be manually offset by 100mm to further aid the working requirements of the operator.

	TRACTOR HP	MINIMUM WEIGHT GUIDE	MACHINE WEIGHT	CUTTING WIDTH	HITCH	PTO SPEED	OFFSET DISTANCE	FLAIL TYPE	NUMBER OF FLAILS	CUTTING HEIGHT
	15 - 30hp (12 - 19kW)	1700kg (3748lbs)	235kg (518lbs)	1.50m (4' 11")	Rear mount only	540rpm	100mm (mechanical)	Heavy-duty hammer flail	22	10 - 50mm (3/8" - 2")

*For inspection purposes only and not to be opened whilst working. Spearhead Machinery claims no responsibility for accident or incident arising from the opening of the inspection area whilst the machine is in operation.



TRACTOR
POWER

15hp
(12kW)



CUT WIDTH

1.50m
(4' 11")



SNIPER

CATEGORY 1/2 HEADSTOCK
WITH FLOATING CLEVIS TOP LINK

MULTI-BELT DRIVE WITH 540/1000RPM
ADAPTABILITY BY REVERSING DRIVE PULLEYS

OPENING INSPECTION AND MAINTENANCE HOOD*

HEAVY-DUTY GEARBOX WITH INTEGRATED
ENCLOSED CONNECTING SHAFT

FULLY WELDED CONSTRUCTION

REAR ROLLER SCRAPER

REAR ROLLER
HEIGHT ADJUSTMENT

140MM FULL WIDTH REAR ROLLER


FULL WIDTH STEEL FRONT PROTECTION FLAPS

REPLACEABLE
BOLT-ON SKIDS

CONSTRUCTION



ROTOR DESIGN



HEAVY-DUTY HAMMER
FLAILS TO CUT UP
TO 40MM MATERIAL

FLAIL



HAMMER

OFFSET



INLINE

OFFSET (400MM)

The Sniper flail mower is designed for agricultural and municipal use giving a high quality and consistent cut in material up to 40mm. It is the perfect choice for maintenance of farmland and pasture areas.

This robust machine features heavy-duty hammer flails fitted on an electronically balanced rotor mounted on enclosed, self-aligning bearings. Belt drive gives reliable power

transmission and a 140mm full width adjustable, self-cleaning rear roller with scraper will ensure a quality cut and well distributed finish.

The Sniper range is available in a choice of working widths between 1.9 and 2.7 metres with operating flexibility offered by a 400mm hydraulic side shift that allows work around trees and other obstructions.

	 TRACTOR HP	 MINIMUM WEIGHT GUIDE	 MACHINE WEIGHT	 CUTTING WIDTH	 HITCH	 PTO SPEED	 OFFSET DISTANCE	 FLAIL TYPE	 NUMBER OF FLAILS	 CUTTING HEIGHT
SPEARHEAD SNIPER 190	50 - 130hp (37 - 97kW)	2900kg (6393lbs)	500kg (1102lbs)	1.90m (6' 3")	Rear mount only	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	24	15 - 65mm (9/16" - 2 9/16")
SPEARHEAD SNIPER 225	60 - 130hp (45 - 97kW)	2900kg (6393lbs)	565kg (1246lbs)	2.25m (7' 5")	Rear mount only	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	28	15 - 65mm (9/16" - 2 9/16")
SPEARHEAD SNIPER 250	80 - 130hp (60 - 97kW)	2900kg (6393lbs)	620kg (1367lbs)	2.50m (8' 2")	Rear mount only	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	32	15 - 65mm (9/16" - 2 9/16")
SPEARHEAD SNIPER 270	80 - 130hp (60 - 97kW)	2900kg (6393lbs)	670kg (1477lbs)	2.70m (8' 10")	Rear mount only	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	34	15 - 65mm (9/16" - 2 9/16")

*For inspection purposes only and not to be opened whilst working. Spearhead Machinery claims no responsibility for accident or incident arising from the opening of the inspection area whilst the machine is in operation.



TRACTOR
POWER

From 50hp
(37kW)



CUT WIDTH

1.90-2.70m
(6'3"-8'10")



SNIPER RS

MULTI-BELT DRIVE WITH 540/1000RPM
ADAPTABILITY BY REVERSING DRIVE PULLEYS

FULLY WELDED CONSTRUCTION




140MM FULL WIDTH
REAR ROLLER

CONSTRUCTION




ROTOR DESIGN



SPIRAL ROTOR DESIGN
WITH FLAIL OPTIONS

HEAVY-DUTY HAMMER
FLAILS TO CUT UP
TO 40MM MATERIAL

REAR ROLLER SCRAPER

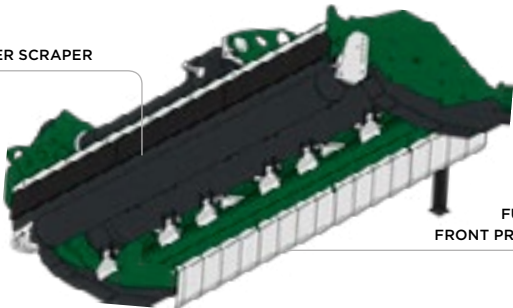


FULL WIDTH STEEL
FRONT PROTECTION FLAPS

FLAIL



HAMMER

OFFSET

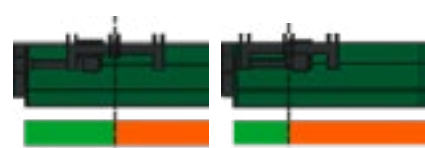

INLINE

OFFSET (400MM)

FRONT AND REAR CONFIGURABLE CATEGORY 1/2
HEADSTOCK WITH FLOATING CLEVIS TOP LINK

400MM HYDRAULIC OFFSET

HEAVY-DUTY GEARBOX WITH INTEGRATED
ENCLOSED CONNECTING SHAFT

REPLACEABLE
BOLT-ON SKIDS

REAR ROLLER
HEIGHT ADJUSTMENT

The Sniper RS brings the same features as the standard Spearhead Sniper with the added ability of being assembled for its operation front or rear mounted thanks to a cowl construction which allows for the headstock assembly to be fitted in two different ways.

This cost-effective machine can be attached to a wide range of prime movers with the addition of 400mm hydraulic sideshift ability allowing the machine greater access to cut in

harder to reach farmland and pasture areas.

All Sniper RS machines come with a minimum of 24 hammer flails, operating at a high tip speed via a 540rpm input multi-belt driveline. This is combined with a 140mm full width adjustable, self-cleaning rear roller with scraper to ensure a professional, well distributed cut in material up to 40mm in diameter.

	 TRACTOR HP	 MINIMUM WEIGHT GUIDE	 MACHINE WEIGHT	 CUTTING WIDTH	 HITCH	 PTO SPEED	 OFFSET DISTANCE	 FLAIL TYPE	 NUMBER OF FLAILS	 CUTTING HEIGHT
SPEARHEAD SNIPER 190 RS	50 - 130hp (37 - 97kW)	2900kg (6393lbs)	525kg (1158lbs)	1.90m (6' 3")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	24	15 - 65mm (9/16" - 2 9/16")
SPEARHEAD SNIPER 225 RS	60 - 130hp (45 - 97kW)	2900kg (6393lbs)	590kg (1301lbs)	2.25m (7' 5")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	28	15 - 65mm (9/16" - 2 9/16")
SPEARHEAD SNIPER 250 RS	80 - 130hp (60 - 97kW)	2900kg (6393lbs)	650kg (1433lbs)	2.50m (8' 2")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	32	15 - 65mm (9/16" - 2 9/16")



TRACTOR
POWER

From 50hp
(37kW)



CUT WIDTH

1.90 - 2.50m
(6'3" - 8'2")




SNIPER OFFSET



CONSTRUCTION




ROTOR DESIGN

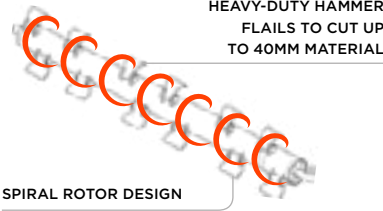

FLAIL



OFFSET

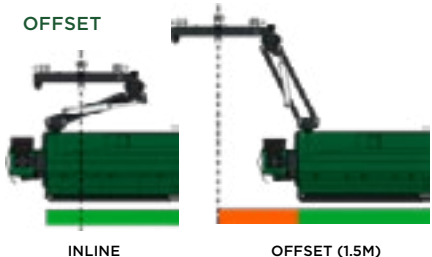

The Sniper Offset flail mower is designed for verge and embankment use giving a high quality and consistent cut in material up to 40mm. It is the perfect choice for maintenance of places such as waterways and highways.

The Sniper Offset range is available in a choice of working widths between 1.6 and 2.3 metres with additional operating flexibility through variable parallel offsetting arms up to a maximum of 1.5m to cater to the working environment. In

addition, the machine features variable cowl angling to aid the following of ground contours.

This robust machine features heavy-duty hammer flails fitted on an electronically balanced rotor mounted on enclosed, self-aligning bearings. Belt drive gives reliable power transmission and a 140mm full width adjustable, self-cleaning rear roller with scraper and rubber flap will ensure a quality cut and well distributed finish.

	TRACTOR HP	MINIMUM WEIGHT GUIDE	MACHINE WEIGHT	CUTTING WIDTH	HITCH	PTO SPEED	OFFSET DISTANCE	FLAIL TYPE	NUMBER OF FLAILS	CUTTING HEIGHT
SPEARHEAD SNIPER 160 OFF-SET	80 - 160hp (60 - 120kW)	5500kg (12125lbs)	680kg (1499lbs)	1.60m (5' 3")	Rear mount only	540rpm	1.46m (4' 9") (hydraulic)	Heavy-duty hammer flail	20	15 - 65mm (9/16" - 2 9/16")
SPEARHEAD SNIPER 190 OFF-SET	90 - 160hp (67 - 120kW)	5500kg (12125lbs)	710kg (1565lbs)	1.90m (6' 3")	Rear mount only	540rpm	1.46m (4' 9") (hydraulic)	Heavy-duty hammer flail	24	15 - 65mm (9/16" - 2 9/16")
SPEARHEAD SNIPER 225 OFF-SET	100 - 160hp (75 - 120kW)	5500kg (12125lbs)	890kg (1742lbs)	2.25m (7' 5")	Rear mount only	540rpm	1.46m (4' 9") (hydraulic)	Heavy-duty hammer flail	28	15 - 65mm (9/16" - 2 9/16")

*For inspection purposes only and not to be opened whilst working. Spearhead Machinery claims no responsibility for accident or incident arising from the opening of the inspection area whilst the machine is in operation.



TRACTOR
POWER

From 80hp
(60kW)



CUT WIDTH

1.60-2.25m
(5'3"-7'5")




SNIPER HD

MULTI-BELT DRIVE WITH 540/1000RPM
ADAPTABILITY BY REVERSING DRIVE PULLEYS

HEAVY-DUTY GEARBOX WITH
INTEGRATED ENCLOSED CONNECTING SHAFT

REAR ROLLER SCRAPER

194MM FULL WIDTH REAR ROLLER

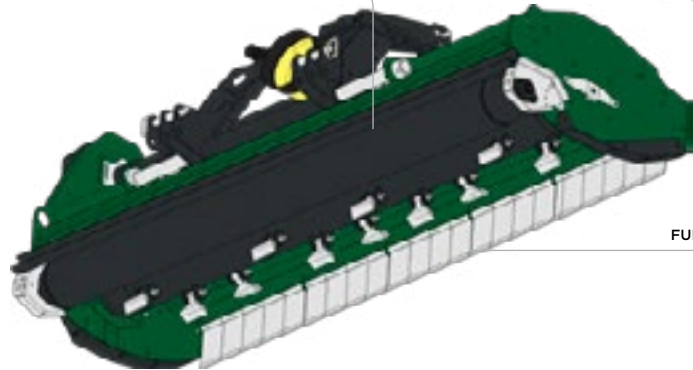

CATEGORY 1/2 HEADSTOCK WITH
FLOATING CLEVIS TOP LINK SUITABLE
FOR FRONT OR REAR MOUNTING

FULLY WELDED CONSTRUCTION

400MM HYDRAULIC OFFSET

REPLACEABLE
BOLT-ON SKIDS


REAR ROLLER HEIGHT ADJUSTMENT

FULL WIDTH STEEL FRONT PROTECTION FLAPS

CONSTRUCTION



ROTOR DESIGN




HEAVY-DUTY HAMMER
FLAILS TO CUT UP
TO 60MM MATERIAL

FLAIL



OFFSET

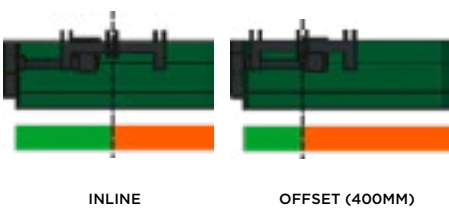

The Sniper HD flail mower is designed for agricultural and municipal use giving a high quality and consistent cut in material up to 60mm. It is the perfect choice for intense farmers and professional operators such as contractors and local authorities.

This robust machine features heavy-duty hammer flails fitted in a double helical pattern on an electronically balanced rotor mounted on enclosed, self-aligning bearings. Belt drive gives

reliable power transmission and a 194mm full width self-cleaning rear roller with scraper and rubber flap will ensure a quality cut and well distributed finish.

The Sniper HD range is available in a choice of working widths between 2.4 and 3.0 metres with operating flexibility offered by a 400mm hydraulic side shift that allows work around trees and other obstructions. The machine can also be front or rear mounted thanks to a reversible headstock.

	 TRACTOR HP	 MINIMUM WEIGHT GUIDE	 MACHINE WEIGHT	 CUTTING WIDTH	 HITCH	 PTO SPEED	 OFFSET DISTANCE	 FLAIL TYPE	 NUMBER OF FLAILS	 CUTTING HEIGHT
SPEARHEAD SNIPER 240 HD	80 - 180hp (60 - 135kW)	2900kg (6393lbs)	905kg (1995lbs)	2.40m (7' 10")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	32	35 - 110mm (1 3/8" - 4 5/16")
SPEARHEAD SNIPER 260 HD	90 - 180hp (67 - 135kW)	2900kg (6393lbs)	935kg (2061lbs)	2.60m (8' 6")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	32	35 - 110mm (1 3/8" - 4 5/16")
SPEARHEAD SNIPER 280 HD	90 - 180hp (67 - 135kW)	2900kg (6393lbs)	990kg (2183lbs)	2.80m (9' 2")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	36	35 - 110mm (1 3/8" - 4 5/16")
SPEARHEAD SNIPER 300 HD	100 - 180hp (75 - 135kW)	2900kg (6393lbs)	1025kg (2260lbs)	3.00m (9' 10")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	40	35 - 110mm (1 3/8" - 4 5/16")

SNIPER HD



TRACTOR
POWER

From 80hp
(60kW)



CUT WIDTH

2.40-3.00m
(7'10"-9'10")





UNIT OPTIONS



REAR FLAP KIT

SNIPER HD OFFSET

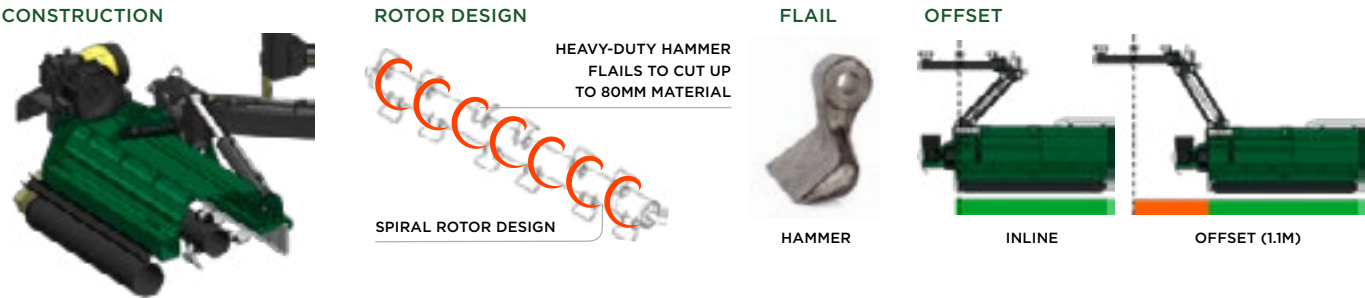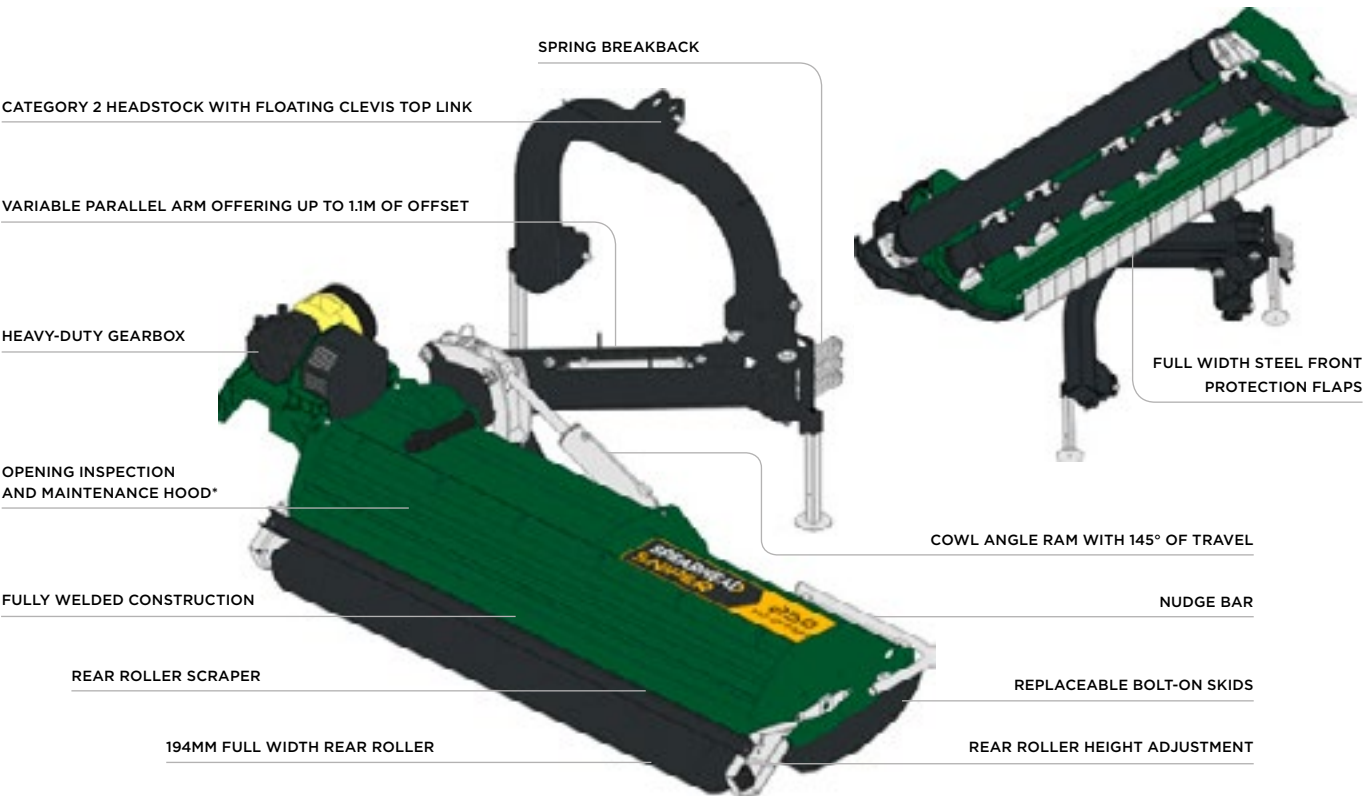

The Sniper HD Offset flail mower is designed for intense verge and embankment use giving a high quality and consistent cut in material up to 80mm. It is the perfect choice for maintenance of places such as waterways, highways and heavy, overgrown scrub areas.

The Sniper HD Offset range is available in a working width from 2.3 metres with additional operating flexibility through variable parallel offsetting arms up to a maximum of 1.1m to cater to the working environment. In addition, the machine

features variable cowl angling to aid the following of ground contours.

This highly robust machine features heavy-duty hammer flails fitted on an electronically balanced rotor mounted on enclosed, self-aligning bearings. Belt drive gives reliable power transmission in challenging conditions and a 194mm full width adjustable, self-cleaning rear roller with scraper will ensure a quality cut and well distributed finish.

	TRACTOR HP	MINIMUM WEIGHT GUIDE	MACHINE WEIGHT	CUTTING WIDTH	HITCH	PTO SPEED	OFFSET DISTANCE	FLAIL TYPE	NUMBER OF FLAILS	CUTTING HEIGHT
SPEARHEAD SNIPER 230 HD OFF-SET	130 - 200hp (97 - 150kW)	5500kg (12125lbs)	1130kg (2291lbs)	2.30m (7' 6")	Rear mount only	540 / 1000rpm	1.09m (3' 7") (hydraulic)	Heavy-duty hammer flail	20	3 - 57mm (1/8" - 2 1/4")
SPEARHEAD SNIPER 250 HD OFF-SET	140 - 200hp (104 - 150kW)	5500kg (12125lbs)	1200kg (2646lbs)	2.50m (8' 2")	Rear mount only	540 / 1000rpm	1.09m (3' 7") (hydraulic)	Heavy-duty hammer flail	22	3 - 57mm (1/8" - 2 1/4")

*For inspection purposes only and not to be opened whilst working. Spearhead Machinery claims no responsibility for accident or incident arising from the opening of the inspection area whilst the machine is in operation.



TRACTOR
POWER

From 130hp
(97kW)



CUT WIDTH

2.30 - 2.50m
(7' 6" - 8' 2")



SNIPER SHD

MULTI-BELT DRIVE WITH 540/1000RPM
ADAPTABILITY BY REVERSING DRIVE PULLEYS

HEAVY-DUTY GEARBOX WITH
INTEGRATED ENCLOSED CONNECTING SHAFT

REAR ROLLER SCRAPER

194MM FULL WIDTH REAR ROLLER

CATEGORY 2 HEADSTOCK WITH FLOATING CLEVIS
TOP LINK SUITABLE FOR FRONT OR REAR MOUNTING

400MM HYDRAULIC OFFSET

FULLY WELDED CONSTRUCTION

REPLACEABLE
BOLT-ON SKIDS


REAR ROLLER HEIGHT ADJUSTMENT

FULL WIDTH STEEL FRONT PROTECTION
FLAPS WITH SECONDARY LENGTH OF CHAINS

CONSTRUCTION



ROTOR DESIGN



HEAVY-DUTY HAMMER
FLAILS TO CUT UP
TO 80MM MATERIAL


SPIRAL ROTOR DESIGN

FLAIL



HAMMER

OFFSET

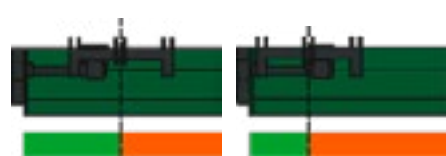

INLINE

OFFSET (400MM)

The Sniper SHD flail mower is designed for agricultural and municipal use giving a high quality and consistent cut in material up to 80mm. It is the perfect choice for intense use farmers and professional operators such as contractors and local authorities.

This highly robust machine features heavy-duty hammer flails fitted on an electronically balanced rotor mounted on enclosed, self-aligning bearings. Belt drive gives reliable power transmission in challenging conditions and a 194mm full width

adjustable, self-cleaning rear roller with scraper will ensure a quality cut and well distributed finish; even in the most intense terrain.

The Sniper SHD range is available in a choice of working widths between 2.5 and 2.8 metres with operating flexibility offered by a 400mm hydraulic side shift that allows work around trees and other obstructions. The machine can also be front or rear mounted thanks to a reversible headstock.

	 TRACTOR HP	 MINIMUM WEIGHT GUIDE	 MACHINE WEIGHT	 CUTTING WIDTH	 HITCH	 PTO SPEED	 OFFSET DISTANCE	 FLAIL TYPE	 NUMBER OF FLAILS	 CUTTING HEIGHT
SPEARHEAD SNIPER 210 SHD	60-120hp (45-90kW)	5500kg (12125lbs)	1050kg (2315lbs)	2.10m (6' 11")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	23	35 - 123mm (13/8" - 4 13/16")
SPEARHEAD SNIPER 250 SHD	70-130hp (52-97kW)	5500kg (12125lbs)	1150kg (2535lbs)	2.50m (8' 2")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	25	35 - 123mm (13/8" - 4 13/16")
SPEARHEAD SNIPER 280 SHD	80-130hp (60-97kW)	5500kg (12125lbs)	1230kg (2712lbs)	2.80m (9' 2")	Front and rear mount	540 / 1000rpm	400mm (hydraulic)	Heavy-duty hammer flail	27	35 - 123mm (13/8" - 4 13/16")



TRACTOR
POWER

From 60hp
(45kW)




CUT WIDTH

2.10-2.80m
(6'11"-9'2")




UNIT OPTIONS

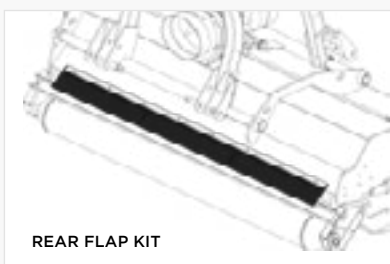

REAR FLAP KIT

SNIPER 600 SHD

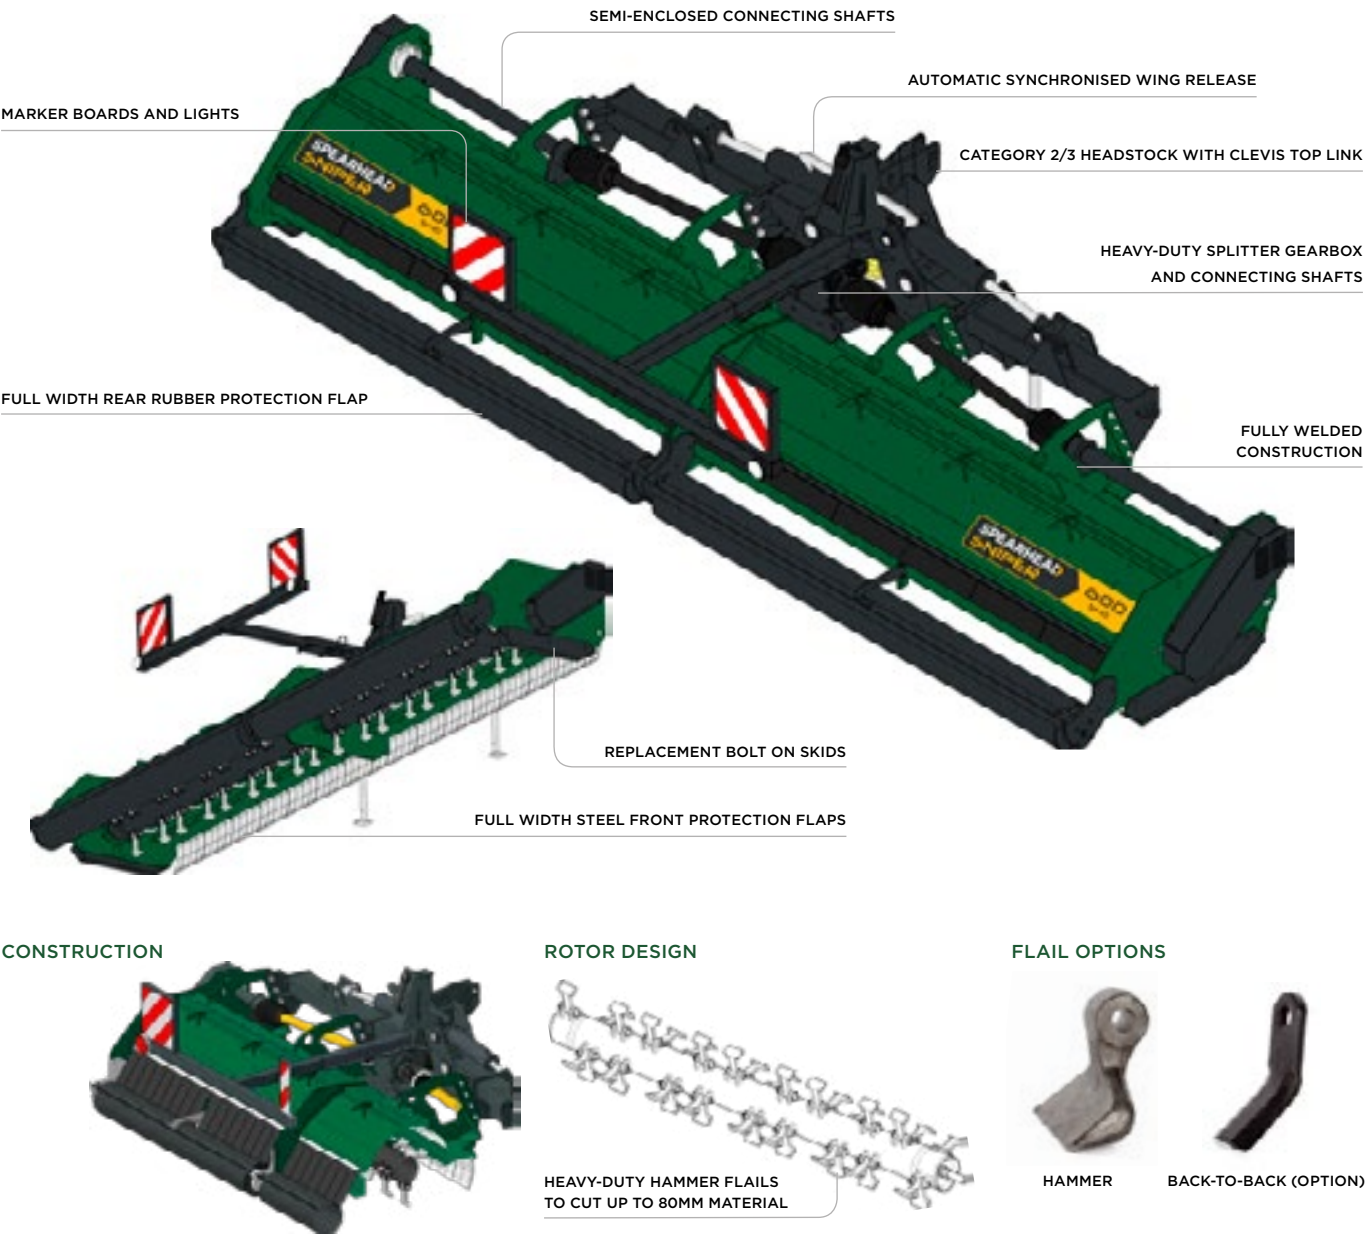

The Sniper 600SHD flail mower is designed for agricultural and municipal use giving a high quality and consistent cut in material up to 80mm. It is the perfect choice for high-output, intense use farmers and professional operators such as contractors and local authorities.

This highly robust machine features heavy-duty hammer flails fitted on two electronically balanced rotors mounted on

enclosed, self-aligning bearings. Belt drive and heavy-duty driveline gives reliable power transmission in challenging conditions and with four, height adjustable, 15" guidance wheels will ensure a quality cut and well distributed finish; even in the most intense terrain.

The Sniper 600SHD range is available in a working width of 6.2 metres which a fold into a transport width of less than 2.5m.

										
TRACTOR HP	MINIMUM WEIGHT GUIDE	MACHINE WEIGHT	CUTTING WIDTH	HITCH	PTO SPEED	OFFSET DISTANCE	FLAIL TYPE	NUMBER OF FLAILS	CUTTING HEIGHT	
	120-280hp (90-209kW)	7500kg (16535lbs)	3100kg (6834lbs)	6.20m (20' 1")	2.45m (8' 1")	Rear mount only	1000rpm	Heavy-duty hammer flail	72	22 - 83mm (7/8" - 3 1/4")



TRACTOR
POWER

120hp
(90kW)



CUT WIDTH

6.20m
(20' 4")



UNIT OPTIONS

INTERROW DISC



REAR WHEEL KIT
(INSTEAD OF ROLLER)



ROLLIFLAIL HD

CATEGORY 2 HEADSTOCK WITH CLEVIS TOP LINK
SUITABLE FOR FRONT OR REAR MOUNTING

DOUBLE SKINNED
FULLY WELDED CONSTRUCTION

685MM HYDRAULIC OFFSET

FULL WIDTH FRONT AND REAR
RUBBER PROTECTION FLAP

HEAVY-DUTY GEARBOX

MULTI-BELT DRIVE
WITH 540/1000RPM
ADAPTABILITY
BY REVERSING
DRIVE PULLEYS

DOUBLE SPIRAL ROTOR

170MM FULL WIDTH
REAR ROLLER


REPLACEABLE BOLT-ON SKIDS

REAR ROLLER HEIGHT ADJUSTMENT

CONSTRUCTION



ROTOR DESIGN



FLAIL



OFFSET



The Spearhead Rolliflail HD mower is designed for heavy-duty flail mowing and gives a high-quality finish in material up to 30mm. Its high output easily manages parkland, orchard, scrub and bramble clearance and roadside verge mowing.

This versatile machine features heavy-duty C flails on a constant suction double spiral rotor. Belt drive gives reliable power transmission and a 170mm full width adjustable rear roller with rubber flap will ensure a quality cut and well distributed finish.

The Rolliflail HD range is available in a choice of working widths between 2.0 and 2.8 metres with further operating flexibility offered by a 685mm hydraulic side shift that allows work around trees and other obstructions if required. The machine can also be front or rear mounted thanks to a reversible headstock.

	 TRACTOR HP	 MINIMUM WEIGHT GUIDE	 MACHINE WEIGHT	 CUTTING WIDTH	 HITCH	 PTO SPEED	 OFFSET DISTANCE	 FLAIL TYPE	 NUMBER OF FLAILS	 CUTTING HEIGHT
SPEARHEAD ROLLIFLAIL 200 HD	50hp (37kW)	5000kg (12125lbs)	730kg (1610lbs)	1.93m (6' 4")	Front and rear mount	540 / 1000rpm	685mm (hydraulic)	C flail	48	30 - 150mm (1.2" - 6")
SPEARHEAD ROLLIFLAIL 250 HD	60hp (45kW)	5000kg (12125lbs)	814kg (795lbs)	2.40m (7' 10")	Front and rear mount	540 / 1000rpm	685mm (hydraulic)	C flail	60	30 - 150mm (1.2" - 6")
SPEARHEAD ROLLIFLAIL 280 HD	70hp (52kW)	5000kg (12125lbs)	730kg (1610lbs)	2.65m (8' 8")	Front and rear mount	540 / 1000rpm	685mm (hydraulic)	C flail	66	30 - 150mm (1.2" - 6")



TRACTOR
POWER

From 50hp
(37kW)



CUT WIDTH

1.93 - 2.65m
(6'4" - 8'8")



UNIT OPTIONS




FRONT WHEEL KIT



BARRIER PLATE

ROLLIFLAIL HD OFFSET

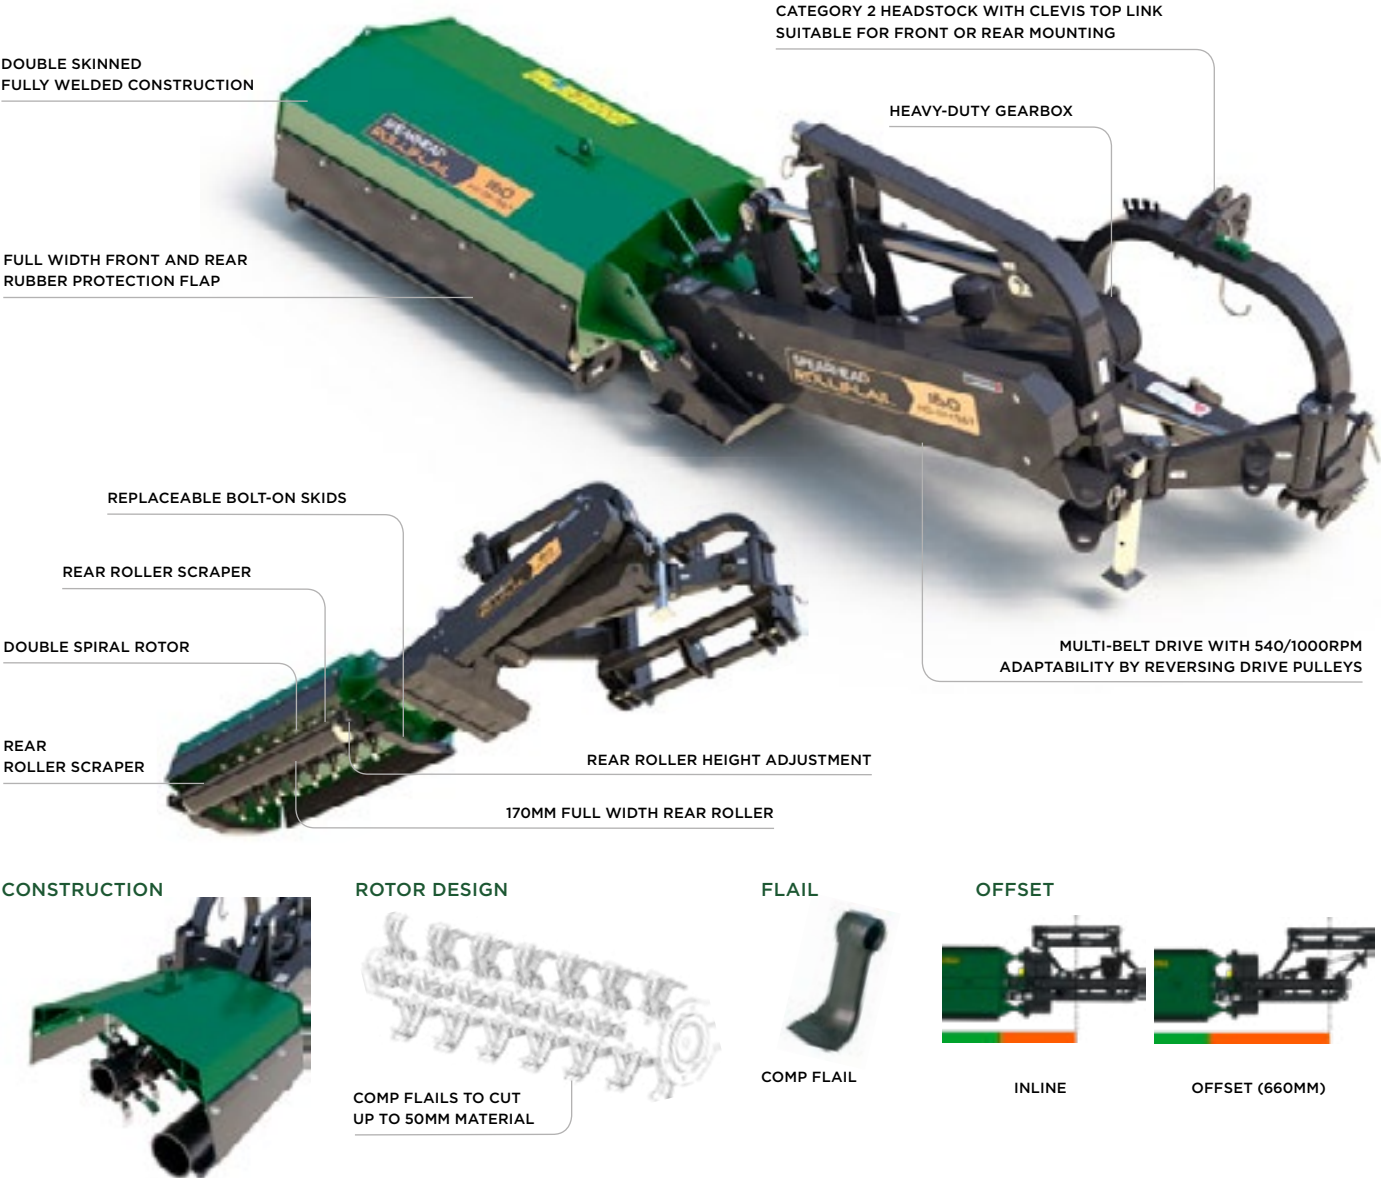

With a working width of 1.2, 1.6 or 2.0 metres this fully offset, the Rolliflail HD Offset is a heavy-duty flail mower designed specifically for professionals that require a high output verge mower for intensive use.

A hydraulic verge floatation system and belt driven spiralled rotor fitted with heavy-duty flails ensure a quality finish even

in the most demanding environments. Safety features include a mechanical safety breakback and a cushioned drive system that protects vital components from any sudden load impacts.

A front mounting build option is also available for users looking to compliment an existing verge mowing configuration for greater productivity.

	 TRACTOR HP	 MINIMUM WEIGHT GUIDE	 MACHINE WEIGHT	 CUTTING WIDTH	 HITCH	 PTO SPEED	 OFFSET DISTANCE	 FLAIL TYPE	 NUMBER OF FLAILS	 CUTTING HEIGHT
	50hp (37kW)	5500kg (12125lbs)	1010kg (2227lbs)	1.15m (3' 9")	Front and rear mount	540 / 1000rpm	660mm (hydraulic)	Comp flail	38	15 - 150mm (9/16" - 6")
	60hp (45kW)	5500kg (12125lbs)	1060kg (2337lbs)	1.45m (7' 10")	Front and rear mount	540 / 1000rpm	660mm (hydraulic)	Comp flail	48	15 - 150mm (9/16" - 6")
	70hp (52kW)	5500kg (12125lbs)	1150kg (2536lbs)	2.00m (6' 7")	Front and rear mount	540 / 1000rpm	660mm (hydraulic)	Comp flail	66	15 - 150mm (9/16" - 6")



TRACTOR
POWER

From 50hp
(37kW)



CUT WIDTH

1.15 - 2.00m
(3' 9" - 6' 7")



SNIPER MINI/COMPACT MACHINES

STANDARD SPECIFICATION	SNIPER 125 MINI	SNIPER 150 COMPACT
FEATURES		
Minimum weight guide	1700kg (3748lbs)	1700kg (3748lbs)
Machine weight*	115kg (254lbs)	235kg (518lbs)
Hitch	Cat 1-2 with floating clevis top link	Cat 1-2 with floating clevis top link
Hitch position	Rear mount only	Rear mount only
Cutting width	1.25m (4' 1")	1.50m (4' 11")
Overall width	1.40m (4' 8")	1.67m (5' 6")
Overall length	0.65m (2' 2")	0.78m (2' 7")
Cowl height**	330mm (1' 1")	422mm (1' 5")
Cutting height	22mm – 47mm (7/8" – 1 9/16")	10mm – 50mm (3/8" – 2")
Cutting capacity	10mm (3/8")	30mm (1 3/16")
Maximum offset distance	N/A	100mm (3 15/16")
Offset type	N/A	Mechanical
Recommended tractor HP	15 – 30hp (12 – 19kW)	15 – 30hp (12 – 19kW)
Power take-off speed	540rpm	540rpm
DRIVELINE		
Gearbox	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft
Input shaft	1 3/8" Z6	1 3/8" Z6
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	0.3 litres (0.5 pints)	0.8 litres (1.7 pints)
Belt quantity	2	2
CONSTRUCTION		
Cowl construction	All welded construction	All welded construction
Skid construction	Replaceable bolt-on skid	Replaceable bolt-on skid
FLAIL, ROTOR AND ROLLER		
Type (standard)	Heavy-duty hammer flail	Heavy-duty hammer flail
Quantity	26	22
Flail tip speed	45 m/s (8858 fpm)	41 m/s (8070 fpm)
Rotor diameter	60mm (2 3/8")	114mm (4 1/2")
Roller diameter	114mm (4 1/2")	114mm (4 1/2")

*Weights may vary dependent on machine type and specification

**Top of cowl to floor

SNIPER MACHINES

STANDARD SPECIFICATION	SNIPER 190	SNIPER 225	SNIPER 250	SNIPER 270
FEATURES				
Minimum weight guide	2900kg (6393lbs)	2900kg (6393lbs)	2900kg (6393lbs)	2900kg (6393lbs)
Machine weight*	500kg (1102lbs)	565kg (1246lbs)	620kg (1367lbs)	670kg (1477lbs)
Hitch	Category 2 with floating clevis top link	Category 2 with floating clevis top link	Category 2 with floating clevis top link	Category 2 with floating clevis top link
Hitch position	Rear mount only	Rear mount only	Rear mount only	Rear mount only
Cutting width	1.90m (6' 3")	2.25m (7' 5")	2.50m (8' 2")	2.70m (8' 10")
Overall width	2.10m (6' 11")	2.45m (8' 1")	2.70m (8' 10")	2.90m (9' 6")
Overall length	0.95m (3' 2")	0.95m (3' 2")	0.95m (3' 2")	0.95m (3' 2")
Cowl height**	480mm (1' 7")	480mm (1' 7")	480mm (1' 7")	480mm (1' 7")
Cutting height	15mm – 65mm (9/16" – 2 9/16")	15mm – 65mm (9/16" – 2 9/16")	15mm – 65mm (9/16" – 2 9/16")	15mm – 65mm (9/16" – 2 9/16")
Cutting capacity	40mm (1 9/16")	40mm (1 9/16")	40mm (1 9/16")	40mm (1 9/16")
Maximum offset distance	400mm (1' 4")	400mm (1' 4")	400mm (1' 4")	400mm (1' 4")
Offset type	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Recommended tractor HP	50 – 130hp (37 – 97kW)	60 – 130hp (45 – 97kW)	80 – 130hp (60 – 97kW)	80 – 130hp (60 – 97kW)
Power take-off speed	540 / 1000rpm	540 / 1000rpm	540 / 1000rpm	540 / 1000rpm
DRIVELINE				
Gearbox	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft
Input shaft	1 3/8" Z6	1 3/8" Z6	1 3/8" Z6	1 3/8" Z6
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	1.2 litres (2.1 pints)	1.2 litres (2.1 pints)	1.2 litres (2.1 pints)	1.2 litres (2.1 pints)
Belt quantity	4	5	5	5
CONSTRUCTION				
Cowl construction	All welded construction	All welded construction	All welded construction	All welded construction
Skid construction	Replaceable bolt on skid	Replaceable bolt on skid	Replaceable bolt on skid	Replaceable bolt on skid
FLAIL, ROTOR AND ROLLER				
Type (standard)	Heavy-duty hammer flail	Heavy-duty hammer flail	Heavy-duty hammer flail	Heavy-duty hammer flail
Quantity	24	28	32	34
Flail tip speed	48 m/s (9448 fpm)	48 m/s (9448 fpm)	48 m/s (9448 fpm)	48 m/s (9448 fpm)
Rotor diameter	159mm (6 1/4")	159mm (6 1/4")	159mm (6 1/4")	159mm (6 1/4")
Roller diameter	140mm (5 1/2")	140mm (5 1/2")	140mm (5 1/2")	140mm (5 1/2")

*Weights may vary dependent on machine type and specification

**Top of cowl to floor

SNIPER RS MACHINES

STANDARD SPECIFICATION	SNIPER 190RS	SNIPER 225RS	SNIPER 250RS
FEATURES			
Minimum weight guide	2900kg (6393lbs)	2900kg (6393lbs)	2900kg (6393lbs)
Machine weight*	525kg (1158lbs)	590kg (1301lbs)	650kg (1433lbs)
Hitch	Cat 1-2 with floating clevis top link	Cat 1-2 with floating clevis top link	Cat 1-2 with floating clevis top link
Hitch position	Front and rear mount	Front and rear mount	Front and rear mount
Cutting width	1.90m (6' 3")	2.25m (7' 5")	2.50m (8' 2")
Overall width	2.11m (6' 11")	2.41m (7' 11")	2.71m (8' 11")
Overall length	1.10m (3' 7")	1.10m (3' 7")	1.10m (3' 7")
Cowl height**	0.93m (3' 1")	0.93m (3' 1")	0.93m (3' 1")
Cutting height	15mm - 65mm (9/16" - 2 9/16")	15mm - 65mm (9/16" - 2 9/16")	15mm - 65mm (9/16" - 2 9/16")
Cutting capacity	40mm (1 9/16")	40mm (1 9/16")	40mm (1 9/16")
Maximum offset distance	400mm (1' 4")	400mm (1' 4")	400mm (1' 4")
Offset type	Hydraulic	Hydraulic	Hydraulic
Recommended tractor HP	50 - 130hp (37 - 97kW)	60 - 130hp (45 - 97kW)	80 - 130hp (60 - 97kW)
Power take-off speed	540 / 1000rpm	540 / 1000rpm	540 / 1000rpm
DRIVELINE			
Gearbox	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft
Input shaft	1 3/8" Z6	1 3/8" Z6	1 3/8" Z6
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	1.2 litres (2.1 pints)	1.2 litres (2.1 pints)	1.2 litres (2.1 pints)
Belt quantity	4	5	5
CONSTRUCTION			
Cowl construction	All welded construction	All welded construction	All welded construction
Skid construction	Replaceable bolt-on skid	Replaceable bolt-on skid	Replaceable bolt-on skid
FLAIL, ROTOR AND ROLLER			
Type (standard)	Heavy-duty hammer flail	Heavy-duty hammer flail	Heavy-duty hammer flail
Quantity	24	28	32
Flail tip speed	48 m/s (9448 fpm)	48 m/s (9448 fpm)	48 m/s (9448 fpm)
Rotor diameter	159mm (6 1/4")	159mm (6 1/4")	159mm (6 1/4")
Roller diameter	140mm (5 1/2")	140mm (5 1/2")	140mm (5 1/2")

*Weights may vary dependent on machine type and specification

**Top of cowl to floor

SNIPER OFFSET MACHINES

STANDARD SPECIFICATION	SNIPER 160 OFFSET	SNIPER 190 OFFSET	SNIPER 225 OFFSET
FEATURES			
Minimum weight guide	5500kg (12125lbs)	5500kg (12125lbs)	5500kg (12125lbs)
Machine weight*	680kg (1499lbs)	710kg (1565lbs)	790kg (1742lbs)
Hitch	Category 2 with floating clevis top link	Category 2 with floating clevis top link	Category 2 with floating clevis top link
Hitch position	Rear mount only	Rear mount only	Rear mount only
Cutting width	1.60m (5' 3")	1.90m (6' 3")	2.25m (7' 5")
Overall width	2.18m (7' 2")	2.48m (8' 2")	2.73m (9')
Overall length	1.68m (5' 6")	1.68m (5' 6")	1.68m (5' 6")
Cowl height**	480mm (1' 7")	480mm (1' 7")	480mm (1' 7")
Transport width	1.55m (5' 2")	1.55m (5' 2")	1.55m (5' 2")
Transport height	2.19m (7' 3")	2.49m (8' 3")	2.79m (9' 2")
Cutting height	15mm – 65mm (9/16" – 2 9/16")	15mm – 65mm (9/16" – 2 9/16")	15mm – 65mm (9/16" – 2 9/16")
Cutting capacity	40mm (1 9/16")	40mm (1 9/16")	40mm (1 9/16")
Maximum offset distance	1.46m (4' 9")	1.46m (4' 9")	1.51m (4' 11")
Cowl working angle	90° up / 55° down	90° up / 55° down	90° up / 55° down
Offset type	Hydraulic	Hydraulic	Hydraulic
Recommended tractor HP	80 – 160hp (60 – 120kW)	90 – 160hp (67 – 120kW)	100 – 160hp (75 – 120kW)
Power take-off speed	540rpm	540rpm	540rpm
DRIVELINE			
Gearbox	Cast iron housing	Cast iron housing	Cast iron housing
Input shaft	1 3/8" Z6 wide angle	1 3/8" Z6 wide angle	1 3/8" Z6 wide angle
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	1.2 litres (2.1 pints)	1.2 litres (2.1 pints)	1.2 litres (2.1 pints)
Belt quantity	3	4	5
CONSTRUCTION			
Cowl construction	All welded construction	All welded construction	All welded construction
Skid construction	Replaceable bolt on skid	Replaceable bolt on skid	Replaceable bolt on skid
FLAIL, ROTOR AND ROLLER			
Type (standard)	Heavy-duty hammer flail	Heavy-duty hammer flail	Heavy-duty hammer flail
Quantity	20	24	28
Flail tip speed	48 m/s (9448 fpm)	48 m/s (9448 fpm)	48 m/s (9448 fpm)
Rotor diameter	159mm (6 1/4")	159mm (6 1/4")	159mm (6 1/4")
Roller diameter	140mm (5 1/2")	140mm (5 1/2")	140mm (5 1/2")

*Weights may vary dependent on machine type and specification

**Top of cowl to floor

SNIPER HD MACHINES

STANDARD SPECIFICATION	SNIPER 240HD	SNIPER 260HD	SNIPER 280HD	SNIPER 300HD
FEATURES				
Minimum weight guide	2900kg (6393lbs)	2900kg (6393lbs)	2900kg (6393lbs)	2900kg (6393lbs)
Machine weight*	905kg (1995lbs)	935kg (2061lbs)	990kg (2183lbs)	1025kg (2260lbs)
Hitch	Category 2 with floating clevis top link	Category 2 with floating clevis top link	Category 2 with floating clevis top link	Category 2 with floating clevis top link
Hitch position	Front and rear mount	Front and rear mount	Front and rear mount	Front and rear mount
Cutting width	2.40m (7' 10")	2.60m (8' 6")	2.80m (9' 2")	3.00m (9' 10")
Overall width	2.62m (8' 7")	2.82m (9' 3")	3.00m (9' 10")	3.19m (10' 6")
Overall length	1.15m (3' 9")	1.15m (3' 9")	1.15m (3' 9")	1.15m (3' 9")
Cowl height**	540mm (1' 10")	540mm (1' 10")	540mm (1' 10")	540mm (1' 10")
Cutting height	35mm – 110mm (1 3/8" – 4 5/16")	35mm – 110mm (1 3/8" – 4 5/16")	35mm – 110mm (1 3/8" – 4 5/16")	35mm – 110mm (1 3/8" – 4 5/16")
Cutting capacity	60mm (2 3/8")	60mm (2 3/8")	60mm (2 3/8")	60mm (2 3/8")
Maximum offset distance	400mm (1' 4")	400mm (1' 4")	400mm (1' 4")	400mm (1' 4")
Offset type	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Recommended tractor HP	80 – 180hp (60 – 135kW)	90 – 180hp (67 – 135kW)	90 – 180hp (67 – 135kW)	100 – 180hp (75 – 135kW)
Power take-off speed	540 / 1000rpm	540 / 1000rpm	540 / 1000rpm	540 / 1000rpm
DRIVELINE				
Gearbox	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft
Input shaft	1 3/8" Z6	1 3/8" Z6	1 3/8" Z6	1 3/8" Z6
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	1.5 litres (2.6 pints)	1.5 litres (2.6 pints)	1.5 litres (2.6 pints)	1.5 litres (2.6 pints)
Belt quantity	5	6	6	6
CONSTRUCTION				
Cowl construction	All welded construction	All welded construction	All welded construction	All welded construction
Skid construction	Replaceable bolt on skid	Replaceable bolt on skid	Replaceable bolt on skid	Replaceable bolt on skid
FLAIL, ROTOR AND ROLLER				
Type (standard)	Heavy-duty hammer flail	Heavy-duty hammer flail	Heavy-duty hammer flail	Heavy-duty hammer flail
Quantity	32	32	36	40
Flail tip speed	54 m/s (10629 fpm)	54 m/s (10629 fpm)	54 m/s (10629 fpm)	54 m/s (10629 fpm)
Rotor diameter	219mm (8 5/8")	219mm (8 5/8")	219mm (8 5/8")	219mm (8 5/8")
Roller diameter	194mm (7 5/8")	194mm (7 5/8")	194mm (7 5/8")	194mm (7 5/8")

*Weights may vary dependent on machine type and specification

**Top of cowl to floor

SNIPER HD OFFSET MACHINES

STANDARD SPECIFICATION	SNIPER 230HD OFFSET	SNIPER 250HD OFFSET
FEATURES		
Minimum weight guide	5500kg (12124lbs)	5500kg (12124lbs)
Machine weight*	1130kg (2291lbs)	1200kg (2646lbs)
Hitch	Category 2 with floating clevis top link	Category 2 with floating clevis top link
Hitch position	Rear mount only	Rear mount only
Cutting width	2.30m (7' 6")	2.50m (8' 2")
Overall width	2.86m (9' 4")	3.16m (10' 5")
Overall length	2.16m (7' 1")	2.16m (7' 1")
Cowl height**	540mm (1' 10")	540mm (1' 10")
Transport width	1.61m (5' 4")	1.61m (5' 4")
Transport height	2.97m (9' 9")	3.24m (10' 8")
Cutting height	3mm - 57mm (1/8" - 2 1/4")	3mm - 57mm (1/8" - 2 1/4")
Cutting capacity	80mm (3 3/16")	80mm (3 3/16")
Maximum offset distance	1.09m (3' 7")	1.09m (3' 7")
Cowl working angle	90° up / 55° down	90° up / 55° down
Offset type	Hydraulic	Hydraulic
Recommended tractor HP	130 - 200hp (97 - 150kW)	140 - 200hp (104 - 150kW)
Power take-off speed	540rpm	540rpm
DRIVELINE		
Gearbox	Cast iron housing	Cast iron housing
Input shaft	1 3/8" Z6	1 3/8" Z6
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	2.3 litres (4.0 pints)	2.3 litres (4.0 pints)
Belt quantity	6	6
CONSTRUCTION		
Cowl construction	All welded construction	All welded construction
Skid construction	Replaceable bolt on skid	Replaceable bolt on skid
FLAIL, ROTOR AND ROLLER		
Type (standard)	Heavy-duty hammer flail	Heavy-duty hammer flail
Quantity	20	22
Flail tip speed	50 m/s (9842 fpm)	50 m/s (9842 fpm)
Rotor diameter	168mm (6 5/8")	168mm (6 5/8")
Roller diameter	194mm (7 5/8")	194mm (7 5/8")

*Weights may vary dependent on machine type and specification

**Top of cowl to floor

SNIPER SHD MACHINES

STANDARD SPECIFICATION	SNIPER 210SHD	SNIPER 250SHD	SNIPER 280SHD	SNIPER 600SHD
FEATURES				
Minimum weight guide	5500kg (12125lbs)	5500kg (12125lbs)	5500kg (12125lbs)	7500kg (1653lbs)
Machine weight*	1050kg (2315lbs)	1150kg (2535lbs)	1230kg (2712lbs)	3100kg (6834lbs)
Hitch	Category 2 with floating clevis top link	Category 2 with floating clevis top link	Category 2 with floating clevis top link	Category 2 with floating clevis top link
Hitch position	Front and rear mount	Front and rear mount	Front and rear mount	Rear mount only
Cutting width	2.10m (6' 11")	2.50m (8' 2")	2.80m (9' 2")	6.20m (20' 4")
Overall width	2.30m (7' 7")	2.80m (9' 2")	3.00m (9' 10")	6.55m (21' 6")
Overall length	1.20m (3' 11")	1.20m (3' 11")	1.20m (3' 11")	2.20m (7' 3")
Cowl height**	540mm (1' 10")	540mm (1' 10")	540mm (1' 10")	—
Transport width	—	—	—	2.24m (8' 1")
Cutting height	35mm - 123mm (1 3/8" - 4 13/16")	35mm - 123mm (1 3/8" - 4 13/16")	35mm - 123mm (1 3/8" - 4 13/16")	22mm - 83mm (7/8" - 3 1/4")
Cutting capacity	80mm (3 3/16")	80mm (3 3/16")	80mm (3 3/16")	80mm (3 3/16")
Maximum offset distance	400mm (1' 4")	400mm (1' 4")	400mm (1' 4")	N/A
Offset type	Hydraulic	Hydraulic	Hydraulic	N/A
Recommended tractor HP	60 - 120hp (45 - 90kW)	70 - 130hp (52 - 97kW)	80 - 130hp (60 - 97kW)	120 - 280hp (90 - 209kW)
Power take-off speed	540 / 1000rpm	540 / 1000rpm	540 / 1000rpm	1000rpm
DRIVELINE				
Gearbox	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with semi-enclosed connecting shafts
Input shaft	1 3/8" Z6	1 3/8" Z6	1 3/8" Z6	1' 3/4" Z6
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	2.3 litres (4.0 pints)	2.3 litres (4.0 pints)	2.3 litres (4.0 pints)	4.4 litres (7.7 pints)
Belt quantity	5	5	5	12 (6 per cowl)
CONSTRUCTION				
Cowl construction	All welded construction	All welded construction	All welded construction	All welded construction
Skid construction	Replaceable bolt on skid	Replaceable bolt on skid	Replaceable bolt on skid	Replaceable bolt on skid
FLAIL, ROTOR AND ROLLER				
Type (standard)	Heavy-duty hammer flail	Heavy-duty hammer flail	Heavy-duty hammer flail	Heavy-duty hammer flail
Quantity	23	25	27	72
Flail tip speed	50 m/s (9842 fpm)	50 m/s (9842 fpm)	50 m/s (9842 fpm)	62 m/s (12204 fpm)
Rotor diameter	168mm (6 5/8")	168mm (6 5/8")	168mm (6 5/8")	219mm (8 10/16")
Roller diameter	194mm (7 5/8")	194mm (7 5/8")	194mm (7 5/8")	273mm (10 3/4")

*Weights may vary dependent on machine type and specification

**Top of cowl to floor

ROLLIFLAIL HD MACHINES

STANDARD SPECIFICATION	ROLLIFLAIL 200HD	ROLLIFLAIL 250HD	ROLLIFLAIL 280HD
FEATURES			
Minimum weight guide	5500kg (12125lbs)	5500kg (12125lbs)	5500kg (12125lbs)
Machine weight*	730kg (1610lbs)	814kg (1795lbs)	860kg (1896lbs)
Hitch	Category 2 with clevis top link	Category 2 with clevis top link	Category 2 with clevis top link
Hitch position	Front and rear mount	Front and rear mount	Front and rear mount
Cutting width	1.93m (6' 4")	2.40m (7' 10")	2.65m (8' 8")
Overall width	2.33m (7' 7")	2.80m (9' 2")	3.01m (9' 10")
Overall length	1.24m (4')	1.24m (4')	1.24m (4')
Cowl height**	700mm (2' 4")	700mm (2' 4")	700mm (2' 4")
Cutting height	30mm - 150mm (1 3/16" - 6")	30mm - 150mm (1 3/16" - 6")	30mm - 150mm (1 3/16" - 6")
Cutting capacity	30mm (1 3/16")	30mm (1 3/16")	30mm (1 3/16")
Maximum offset distance	685mm (2' 3")	685mm (2' 3")	685mm (2' 3")
Offset type	Mechanical	Mechanical	Mechanical
Recommended tractor HP	50hp (37kW)	60hp (45kW)	70hp (52kW)
Power take-off speed	1000rpm	1000rpm	1000rpm
DRIVELINE			
Gearbox	Cast iron housing with enclosed connecting shaft	Cast iron housing with enclosed connecting shaft	Cast iron housing with enclosed connecting shaft
Input shaft	1 3/8" Z6	1 3/8" Z6	1 3/8" Z6
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	1.8 litres (3.1 pints)	1.8 litres (3.1 pints)	1.8 litres (3.1 pints)
Belt quantity	4	4	4
CONSTRUCTION			
Cowl construction	All welded construction	All welded construction	All welded construction
Skid construction	Replaceable bolt on skid	Replaceable bolt on skid	Replaceable bolt on skid
FLAIL, ROTOR AND ROLLER			
Type (standard)	C flail	C flail	C flail
Quantity	48	60	66
Flail tip speed	51 m/s (10039 fpm)	51 m/s (10039 fpm)	51 m/s (10039 fpm)
Rotor diameter	193mm (7 5/8")	193mm (7 5/8")	193mm (7 5/8")
Roller diameter	170mm (6 11/16")	170mm (6 11/16")	170mm (6 11/16")

*Weights may vary dependent on machine type and specification

**Top of cowl to floor

ROLLIFLAIL HD OFFSET MACHINES

STANDARD SPECIFICATION	ROLLIFLAIL 120HD OFFSET	ROLLIFLAIL 160HD OFFSET	ROLLIFLAIL 200HD OFFSET
FEATURES			
Minimum weight guide	5500kg (12125lbs)	5500kg (12125lbs)	5500kg (12125lbs)
Machine weight*	1010kg (2227lbs)	1060kg (2337lbs)	1150kg (2536lbs)
Hitch	Category 2 with clevis top link	Category 2 with clevis top link	Category 2 with clevis top link
Hitch position	Front and rear mount	Front and rear mount	Front and rear mount
Cutting width	1.15m (3' 9")	1.45m (4' 9")	2.00m (6' 7")
Working width (inline)	3.39m (11' 2")	3.67m (12')	4.19m (13' 9")
Working width (offset)	3.73m (12' 3")	4.01m (13' 2")	4.53m (14' 10")
Overall length	1.24m (4' 1")	1.24m (4' 1")	1.24m (4' 1")
Cowl height**	0.65m (2' 2")	0.65m (2' 2")	0.65m (2' 2")
Cutting height	15 - 150mm (9/16" - 6")	15 - 150mm (9/16" - 6")	15 - 150mm (9/16" - 6")
Cutting capacity	50mm (2")	50mm (2")	50mm (2")
Maximum offset distance	0.66m (2' 2")	0.66m (2' 2")	0.66m (2' 2")
Offset type	Hydraulic	Hydraulic	Hydraulic
Recommended tractor HP	50hp (38kW)	60hp (45kW)	70hp (53kW)
Power take-off speed	540 / 1000rpm	540 / 1000rpm	540 / 1000rpm
DRIVELINE			
Gearbox	Cast iron housing	Cast iron housing	Cast iron housing
Input shaft	1 3/8" Z6	1 3/8" Z6	1 3/8" Z6
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	2.3 litres (4.9 pints)	2.3 litres (4.9 pints)	2.3 litres (4.9 pints)
Belt quantity	1	1	1
CONSTRUCTION			
Cowl construction	All welded construction	All welded construction	All welded construction
Skid construction	Replaceable bolt on skid	Replaceable bolt on skid	Replaceable bolt on skid
FLAIL, ROTOR AND ROLLER			
Type (standard)	Comp flail	Comp flail	Comp flail
Quantity	38	48	66
Flail tip speed	53 m/s (10433 fpm)	53 m/s (10433 fpm)	53 m/s (10433 fpm)
Rotor diameter	140mm (5 1/2")	140mm (5 1/2")	140mm (5 1/2")
Roller diameter	169mm (6 5/8")	169mm (6 5/8")	169mm (6 5/8")

*Weights may vary dependent on machine type and specification

**Top of cowl to floor



For full machine dimensions please scan the code
or visit spearheadmachinery.com/dimensions

SPEARHEAD

Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England

☎ +44 (0)1789 491860 ✉ enquiries@spearheadmachinery.com f 🐦 SpearheadWorld

spearheadmachinery.com



A Member of the **ALAMO GROUP**

All information in this brochure is correct at the time of printing. Spearhead Machinery Limited reserves the right to change any of the data or descriptions at any time without prior warning. All dimensions are for reference.